

NOTES

- ① 材料及び仕上げ(めっき仕様) : TABLE 1参照
MATERIAL AND FINISHES : SEE TABLE 1
2. 製品仕様書 : 511630000-PS 000
PRODUCT SPECIFICATION:511630000-PS 000
3. 梱包仕様書 : SPK-53426-002 001
PACKAGING SPECIFICATION: SPK-53426-002 001
4. 嵌合相手 : 51163 シリーズ
MATES WITH:51163 SERIES
5. アプリケーション仕様書(コネクタ取扱い説明書) : 2166940000-AS PS 000
APPLICATION SPECIFICATION(CONNECTOR MANUAL) : 2166940000-AS PS 000
- ⑥ 偶数極に適合
APPLY FOR EVEN CIRCUIT
- ⑦ 2極はキルクを付加しない
3極以上のキルク形状は両サイドが (B)、その他の極は全て (A) 形状とする
KINK FORM
2 CIRCUIT:PINS TO BE NOT KINKED.
MORE THAN 2 CIRCUIT:PINS AT BOTH ENDS ARE KINK FORMED TO (B),
THE OTHER PINS ARE KINK FORMED TO (A).
8. GLOW WIRE TEST 準拠品
THIS PRODUCT IS GLOW WIRE TEST COMPATIBLE.


1.9	1.25	38.2	35	39.9	534269150	15
		35.7	32.5	37.4	534269140	14
		33.2	30	34.9	534269130	13
		30.7	27.5	32.4	534269120	12
		28.2	25	29.9	534269110	11
		25.7	22.5	27.4	534269100	10
		23.2	20	24.9	534269090	9
		20.7	17.5	22.4	534269080	8
		18.2	15	19.9	534269070	7
		15.7	12.5	17.4	534269060	6
13.2	10	14.9	534269050	5		
10.7	7.5	12.4	534269040	4		
1	8.2	5	9.9	534269030	3	
-	-	5.7	2.5	7.4	534269020	2
E	D	C	B	A	発注番号 ORDER No.	極数 CIRCUIT SIZE
					梱包形態 : トレイ PACKAGE:TRAY	

① TABLE 1


部品 PART	材料 MATERIAL			
① プラグハウジング PLUG HOUSING	ポリアミド ガラス含有 UL94 V-0 色 : ナチュラル(白) POLYAMIDE(PA),GLASS FILLED,UL94 V-0,COLOR:NATURAL(WHITE)			
② プラグピン PLUG PIN	りん青銅 PHOSPHOR BRONZE			
	錫めっき : 1.0MICRO METER MINIMUM. MATTE TIN PLATING : 1.0MICRO METER MINIMUM.			
	銅めっき(下地めっき):0.5MICRO METER MINIMUM COPPER PLATING(UNDER PLATING):0.5MICRO METER MINIMUM.			
DOCUMENT STATUS	P1	RELEASE DATE	2020/11/20	05:18:32

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


DIMENSION UNITS	SCALE	CURRENT REV DESC:	molex			
mm	NTS					
GENERAL TOLERANCES (UNLESS SPECIFIED)			MINI-LOCK 2.5 W/B SINGLE ROW RIGHT ANGLE PLUG ASSEMBLY			
ANGULAR TOL ± 3.0°						
4 PLACES	± 0.2	EC NO: 649584	PRODUCT CUSTOMER DRAWING			
3 PLACES	± 0.2	DRWN: RWATANABE01 2020/11/18				
2 PLACES	± 0.2	CHK'D: AIDA 2020/11/20	DOCUMENT NUMBER			
1 PLACE	± 0.2	APPR: SAKIYAMA 2020/11/20				
0 PLACES	± 0.2	INITIAL REVISION:	534260000-SD			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						
THIRD ANGLE PROJECTION			DOC TYPE	DOC PART	REVISION	
DRAWING			PSD	001	A	
SERIES			SHEET NUMBER			
A2-SIZE			1 OF 2			
53426			GENERAL			




2CIRCUIT



3CIRCUIT




4CIRCUIT

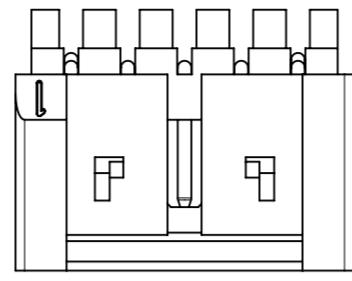


5~15CIRCUIT


ロック形状図
LOCK CONFIGURATION

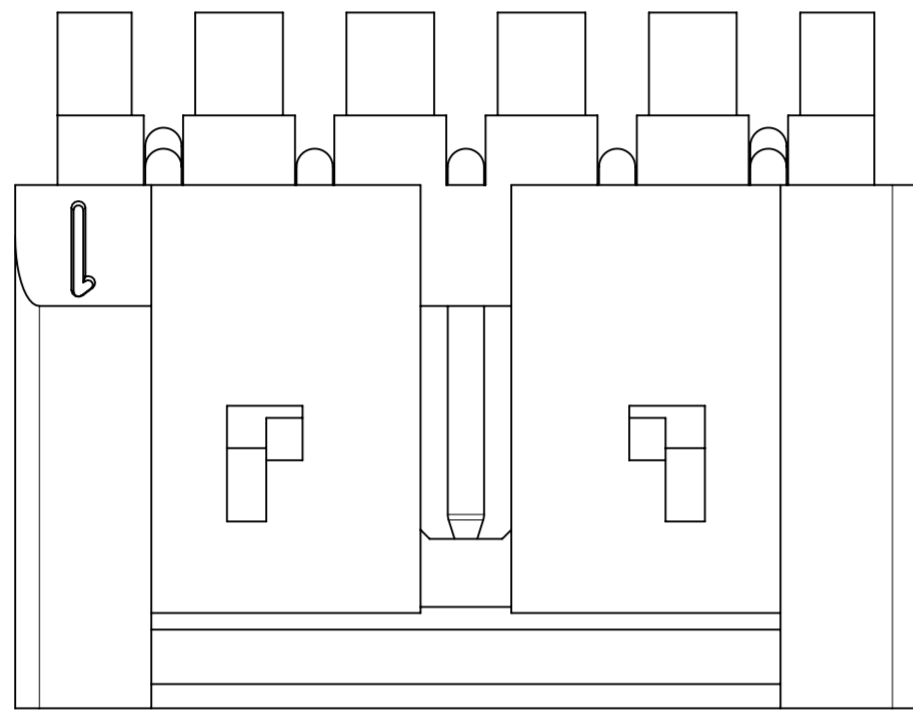

製品レイアウト
PRODUCT LAYOUT

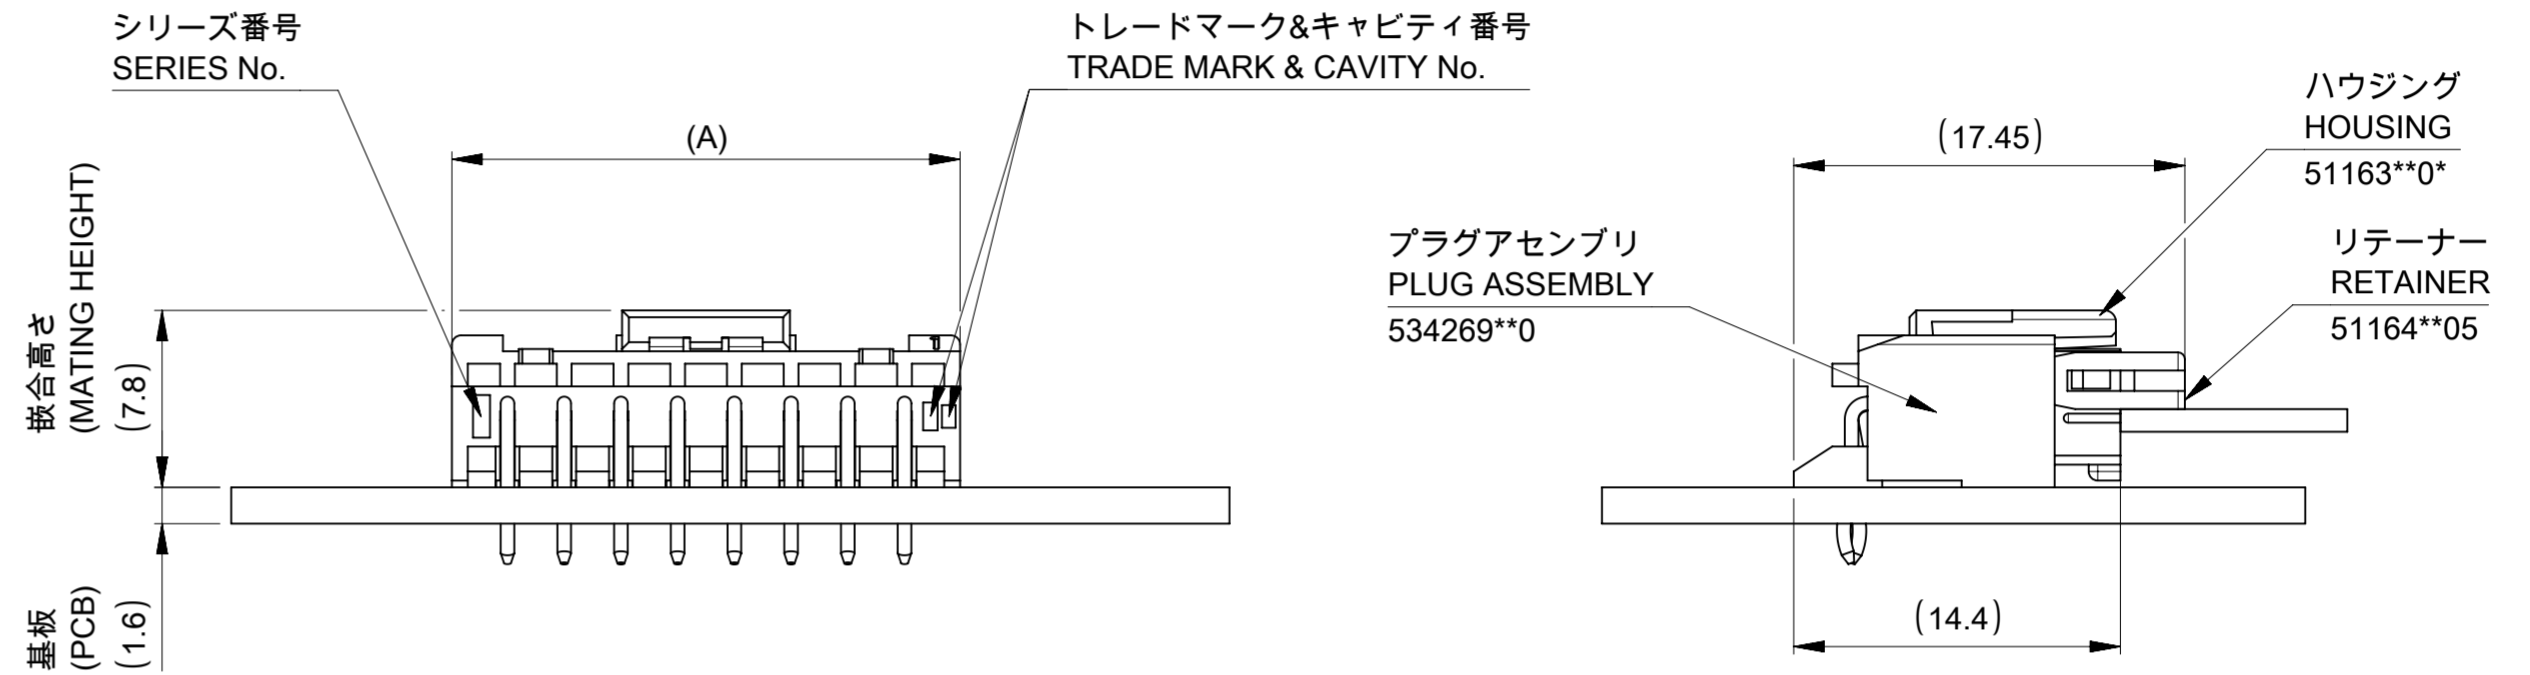

嵌合図
MATED CONNECTORS

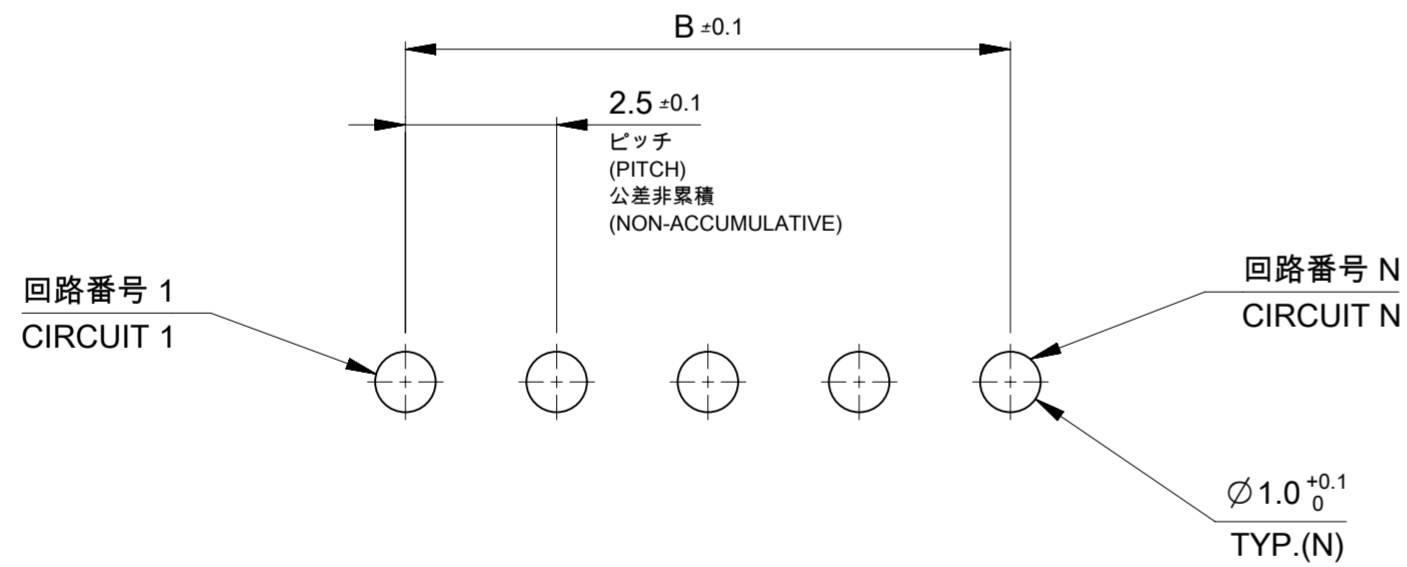

基板取付穴推奨寸法(マウント面)
RECOMMENDED PCB HOLE DIMENSION
(MOUNTING SIDE), (t=1.6)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:									
mm		NTS		<p>molex</p> <p>MINI-LOCK 2.5 W/B SINGLE ROW RIGHT ANGLE PLUG ASSEMBLY</p> <p>PRODUCT CUSTOMER DRAWING</p>									
GENERAL TOLERANCES (UNLESS SPECIFIED)													
ANGULAR TOL		± 3.0°								EC NO: 649584		2020/11/18	
4 PLACES		± 0.2								DRWN: RWATANABE01		2020/11/20	
3 PLACES		± 0.2								CHK'D: AIDA		2020/11/20	
2 PLACES		± 0.2		APPR: SAKIYAMA		2020/11/20							
1 PLACE		± 0.2		INITIAL REVISION:		2020/11/18							
0 PLACES		± 0.2		DRWN: RWATANABE01		2020/11/20							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER					
				A2-SIZE		53426		534260000-SD					
								DOC TYPE DOC PART REVISION					
								PSD 001 A					
								MATERIAL NUMBER CUSTOMER SHEET NUMBER					
								GENERAL 2 OF 2					